


Part Number.....7215-30A  
 Made in the USA..... Yes  
 Mounting..... Vertical  
 AC Rating Volts..... 125  
 AC Rating Amps.....24  
 AC Rating Watts.....6750  
 AC Rating Frequency-Hz.....50/60 HZ  
 Circuit Breaker.....  
 (1) 30A Master; (2) 20A per Circuit  
 Pilot Light.....None  
 On/Off Switch.....None  
 Over Current Protection.....CB  
 Power Cable AWG.....10/3 SJT  
 Power Cable Length.....15'  
 Plug Type.....NEMA L5-30P  
 Receptacle Type.....NEMA 5-20R  
 Receptacle Style.....Single  
 Receptacle Quantity.....  
 24 Total; 12 per Circuit  
 Max. Output per Powerstrip.  
 24 amp total; 16 amp per Circuit  
 Joule Rating.....N/A  
 UL Rating.....  
 60650 (Information Technology Equipment)  
 Clamping Level.....N/A  
 Response Time.....N/A  
 Max. Surge Current.....N/A  
 EMI/RFI Noise Reduction.....N/A  
 Surge Indicator Red LED.....N/A  
 Connected Equipment Warranty....N/A  
 Product Warranty-GLCC.....1 year  
 Certification/Agency Approvals.....UL Approved  
 Unit Weight lbs..... 11

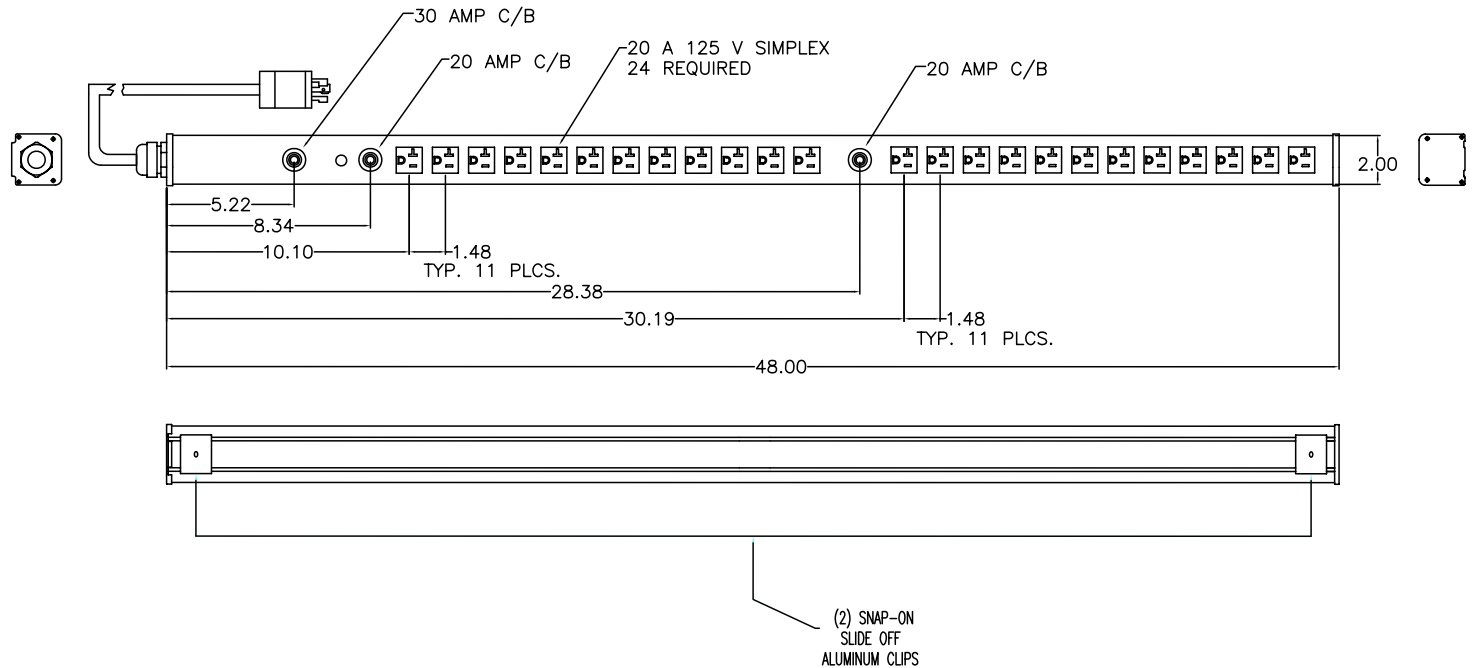

TOLERANCES UNLESS OTHERWISE SPECIFIED		In	Out	Title	
DECIMALS	0.0 = ± 0.100	0.00	0.00	721530A	
	0.00 = ± 0.020	0.00	0.00		
	0.000 = ± 0.005	0.000	0.000		
ANGLES	± 1°	SCALE	N/A	SHT 1 of 1	DWG No. 721530A.DWG
				Rev.	-