



Put it all on us

Cable Runway Installation Instructions




GreatCabinets.com

1-866-879-4522

Cable Runway Installation

GL-CR-BSK Butt Splice Kit

Using the supplied hardware, join two sections of runway together by inserting the bolts through the holes on the brackets and tighten the nuts and washers with a wrench.

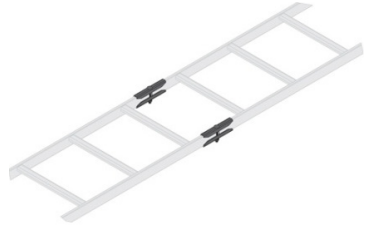


GL-CR-JSK Junction Splice Kit

Using the supplied hardware, join two sections of runway together forming a perpendicular intersection by inserting the bolts through the holes on the brackets and tighten the nuts and washers with a wrench.




GL-CR-610-BSK, GL-CR-610-XX-WTK Wall Termination Kit

Attach the angle to the wall with engineer approved fasteners. Install the runway to the wall angle with the supplied J-bolts.

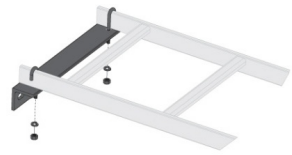


GL-CR-RTR18, GL-CR-RTR24 Rack Termination Kit

Attach mounting plate to the top of the rack using two of the supplied J-bolts. Runway is attached to the plate with the remaining two J-bolts.

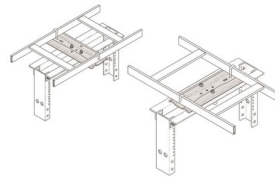

GL-CR-TSBXX Triangle Support Bracket

Attach the triangle bracket to the wall with engineer approved fasteners. Install the runway to the wall angle with the supplied J-bolts. Tighten with wrench. Typical spacing for triangle brackets is 5'-0" OC

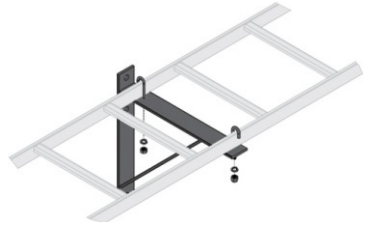


GL-CR-610-VS Vertical Support Bracket

Attach the L bracket to the floor with engineer approved fasteners. Install the runway to the L bracket with the included BSK. Insert the bolts through the holes on the brackets and tighten the nuts and washers with a wrench.




GL-CR-610-TR6-MK Threaded Ceiling Rod

Attach the brackets to the ceiling using engineer approved fasteners. Attach the threaded rod to the brackets with the supplied nuts and washers. The channel bracket is placed with the open side facing out and the threaded rod is then attached to the brackets with the supplied nuts and washers. Adjust the height by moving the placement of the nuts.

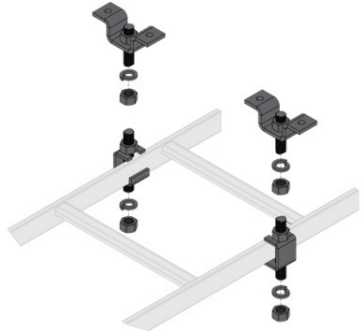

GL-CR-610-X-CRP Cable Retaining Post

Slide the retaining clip onto the rail with the slot facing to the outside of the rail. Insert vertical post into slot and secure with the provided hardware.

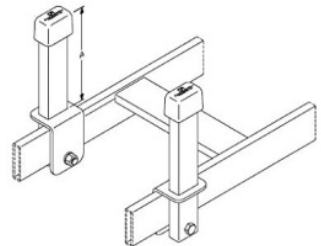

Put it all on us

Thank you
for your
business!



ETSI Associate Member

FORM: #MS - 5.02-63, REV 0