

HINGED DOOR



Utilize aisle containment doors with Great Lakes ES cabinets to create an efficient data center airflow strategy. Doors mount to cabinets or the floor and install across one or two rows of cabinets. Building obstructions, narrow aisles, uneven cabinet heights, or cabinets from another manufacturer? No problem—containment products, including ceiling panels and rigid walls, are built to fit the application!


Custom, built to order to ensure the best fit, function and installation

FEATURES:

- Ordered to size for precise fit
- Auto closer with adjustable speed
- Sturdy aluminum frame

DOOR OPTIONS:

- Clear or corrugated panels
- Clear/black anodize frame
- Aluminum handle
- Free standing
- Custom frame colors
- Other customizations

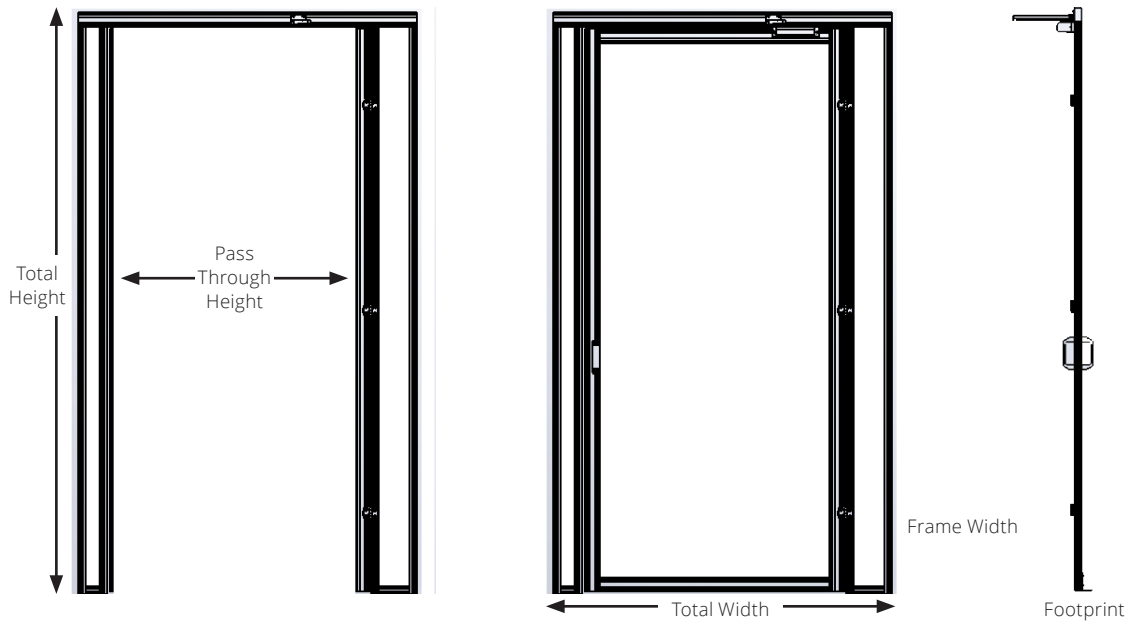

Size and Finish		Panel Options	Test	Result
Total Height*	Up to 98"	Standard Clear Polycarbonate*	ASTM E-84	Class B
Total Width*	Up to 96"		ASTM D635	CC1
Pass Through Width**	39"		ASTM D2843	<75
Footprint	1 3/16"	Premium Clear Polycarbonate	UL 94	V-O
Manufacturing Tolerance	(+/-) 1/32"		ASTM D635	CC1
Door & Frame		Clear PVC	ASTM D2843	Passed
Material	6560 T-6 Temper Aluminum		FM 4910	Passed
Tensile	30,000 psi		UL 94	V-O
*Specify size when ordering ** Custom sizes available			ASTM E-84	Class A

MEASUREMENTS NEEDED:

Total Height - Measurement from ground to top of door.
 Total Width - Measurement from frame edge to frame edge.