



SERIOUS DATA SECURITY.
REAL SERIOUS.

SEAL-R2500




ACCESS CONTROL FOR SERVER RACKS IN VARIOUS ROOMS AND BUILDINGS

- RFID Single-factor authentication
- Label holder with customizable backlit LED
- LED for handle status
- No key override
- Wiegand interface
- Multi-frequency antenna (125kHz and 13.56MHz)
HID Prox, HID iClass, Mifare Classic, Mifare DESFire EV1,
Mifare DESFire EV2, PIV LEAF

See back page for handle specs

DIMENSIONS

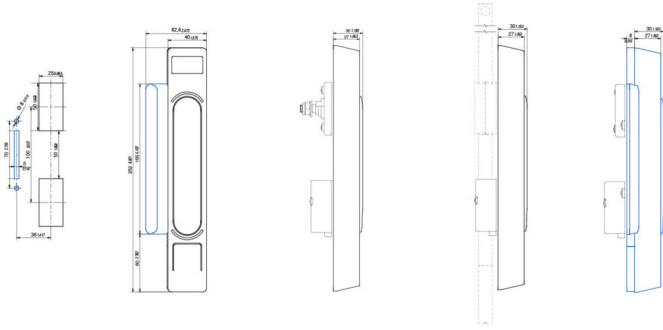

TECHNICAL SPECIFICATIONS

- Power Supply: 5V +10% / 12V ± 10% (DC)
- Bias-Current: 180mA / 60mA (DC)
- Max Current: 400mA / 130mA (DC)
- Data Pulse Interval: 50µs
- Data Signal Delay: 2ms
- Sheet metal thickness from 1.5-2mm (plus powder coating)
- Top mounting screws Tq to 1.0-1.2Nm
- Bottom cap screws Tq to 0.4Nm

LED-DISPLAY STATUS



CONNECTIONS

■ Handle Status	■ PINK
■ Authorized (LED GRN)	■ YELLOW
■ Unauthorized (LED RED)	■ BLUE
■ Data 0	■ GREEN
■ Data 1	■ WHITE
■ 12 V PWR	■ RED
■ Ground	■ BROWN
■ 5V PWR	■ GREY