

Great Lakes



Great Lakes Case & Cabinet Co., Inc.

NEMA 12 WALL MOUNT ENCLOSURE



Available in
black only

www.WeRackYourWorld.com

product spotlight

*We'll make it through
the storm!*

NEMA Type 12K Enclosures are constructed (with knockouts) for indoor use to provide a degree of protection to personnel against access to hazardous parts; protection to equipment inside the enclosure against ingress of solid foreign objects (falling dirt and circulating dust, lint, and fibers); and protection with respect to harmful effects on the equipment due to the ingress of water (dripping and light splashing).

Features

- 19" EIA 310-D Compliant
- Two pair of 12 gauge, #12-24 threaded mounting rails, adjustable front to back
- Reversible mounting
- Keyed locks with dust covers
- Front and rear sections lock independently
- Provisions for cable access for 1", 2", and 3" conduit knock-outs
- 14 gauge main body in rear section
- Independently tested and certified to NEMA-250-1997 Type 12K




Part No. Description

GL24N12	Dimensions: 24.00"H x 24.00"W x 24.00"D Shipping weight: 105 lbs. Rack spaces: 12 RMU Weight capacity: 150 lbs.,
GL36N12	Dimensions: 36.00"H x 24.00"W x 24.00"D Shipping weight: 140 lbs. Rack spaces: 19 RMU Weight capacity: 250 lbs.
GL48N12	Dimensions: 48.00"H x 24.00"W x 24.00"D Shipping weight: 175 lbs. Rack spaces: 26 RMU Weight capacity: 300 lbs.



Great Lakes Case & Cabinet Co., Inc.

NEMA 12 Wall Mount Enclosures

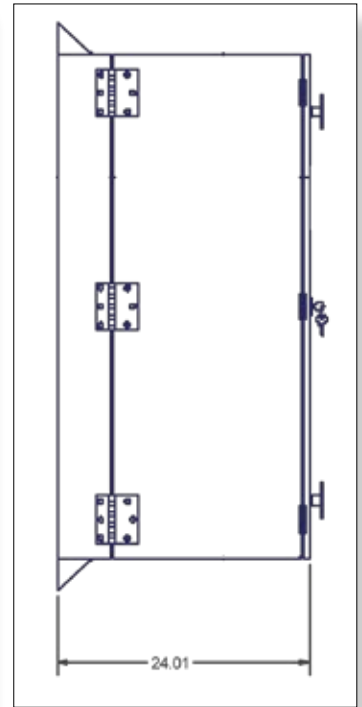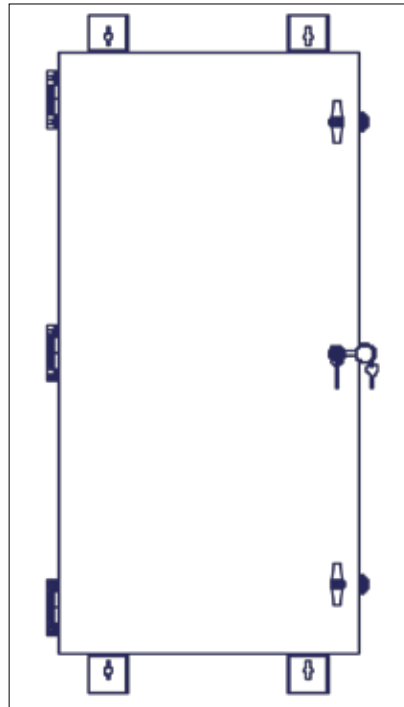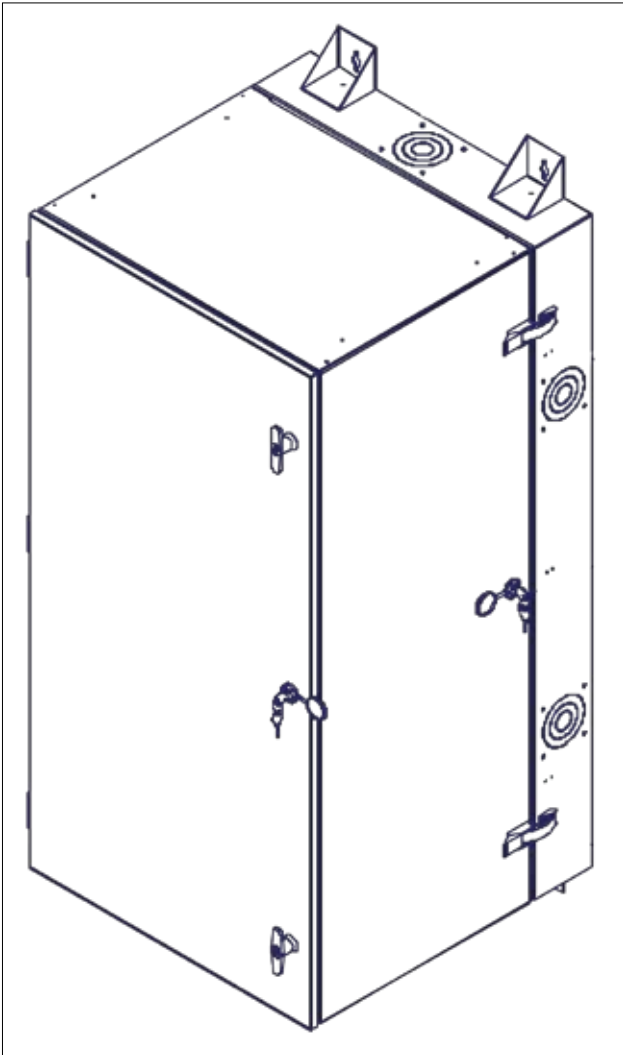

Part No.	A=Height	B=Width	C=Depth
GL24N12	24.00"	24.00"	24.00"
GL36N12	36.00"	24.00"	24.00"
GL48N12	48.00"	24.00"	24.00"

*weRack
your
World!*

Corporate Headquarters

P.O. Box 551 • Edinboro, PA 16412 • 1-866-TRY-GLCC • (1-866-879-4522) • Phone: 814.734.7303 • Fax: 814.734.3907 • glcc@greatcabinets.com

Western Distribution • 535 East Glendale Avenue • Sparks, NV 89431 • Phone: 775.829.9913 • Fax: 775.829.9926

Great Lakes International • Aerbridge House • Dunshaughlin Business Park • Dunshaughlin Co. Meath • Ireland • Phone: 003531 8258777 • Fax: 003531 8258778